

# M560 PowerSIG

Single Phase or 3-Phase multifunction AC power transducer



## POWERSIG

The M560 PowerSig is a complete 1 phase or 3 phase multifunction AC power transducer, providing 3 analog outputs, and the option of an RS485 communication port. Most of the parameters measured by PowerSig can be assigned to the analogue outputs via the RS485.

## PARAMETERS MEASURED

- \* Phase-Phase Voltage (V)
- \* Phase-Neutral Voltage (V)
- \* Phase Current (I)
- \* Frequency (Hz)
- \* Active Power per phase (W)
- \* System Active Power (W)
- \* Reactive Power per phase (VAr)
- \* System Reactive Power (VAr)
- \* Apparent Power per phase (VA)
- \* System Apparent Power (VA)
- \* Import Active Energy (W.h)
- \* Export Active Energy (W.h)
- \* Import Reactive Energy (VAr.h)
- \* Export Reactive Energy (VAr.h)
- \* Apparent Energy (VA.h)
- \* Ampere Energy (A.h)
- \* Power Factor per phase (P.F.)
- \* System Power Factor (P.F.)
- \* Amp Demand (Ad)
- \* Watt Demand (Wd)
- \* VA Demand (VAd)
- \* Maximum Amp Demand (Max Ad)
- \* Maximum Watt Demand Import (Max Wd)
- \* Maximum Watt Demand Export (Max Wd)
- \* Maximum VA Demand (Max VAd)
- \* Neutral Current

## ANALOG OUTPUTS

3 fully isolated analog outputs are standard. This can be reduced to 1 or 2 analog outputs if required. Output signals can be either DC mA or DC volts. Note: If PowerSig is ordered without the RS485 option, the user must specify at time of order which measured parameter and output signal is to be assigned to each of the analog outputs.

## OPTIONS

### COMMUNICATION

PowerSig uses RS485 Modbus protocol. This enables remote reading and programming of the PowerSig via a host computer.

The RS485 allows up to 32 PowerSigs to be connected in parallel, allowing them to be used with PC, PLC, RTU, Data loggers and Scada programs.

The PowerSig's communication port is auto-configurable meaning that when connected to an existing Modbus network it will automatically set Baud rate, Parity and Stop bits. A red LED is provided to indicate power is present, and the unit is communicating correctly. Programming.

The following can be programmed via the RS485 port: CT and VT ratios, assigning parameters to outputs, pulse duration, relay divisor.

Software.

Set-up and monitoring software is available free from your PC&S distributor or visit the PC&S website [www.pc-s.com](http://www.pc-s.com)

### PULSED OUTPUT

An option of pulsed output via a relay is offered. The pulsed output can be assigned to W.h, Var.h (import or export), A.h or VA.h. Optionally the relay can also be used as a control relay.

## BASIC PRODUCT INFORMATION

M560-AT1	1Ph 2W
M560-AT1-3	1Ph 3W
M560-AT4	3Ph 3W
M560-AT9	3Ph 4W
Standard Input	120V-5A AC @ 60Hz
Standard Auxiliary	120V AC
Standard Output	3 x 4-20mA

## GENERAL SPECIFICATION

### INPUT

<b>Rated Un</b>	Direct connected voltages between 57.8 and 600 V. Specify nominal.
<b>Range</b>	2-120% Un
<b>Overload</b>	1.5 x Un cont. 4 x Un for 1 sec
<b>Rated In</b>	1 or 5 amp
<b>Range</b>	0-120% In
<b>Burden</b>	0.5VA per phase Volts & Amps
<b>Overload</b>	4 x In continuous. 50 x In for 1sec
<b>Frequency</b>	50 / 60 Hz nominal range 45/65Hz

### ACCURACY

<b>Specified @ 23°C 10%-Un 10%-In</b>	
<b>Parameters unless stated</b>	Class 0.3% to IEC 688
<b>Volts and Amps</b>	Class 0.25% to IEC 688
<b>Frequency</b>	Class 0.1Hz to IEC 688
<b>Power Factor</b>	Class 1.0% to IEC 688
<b>Active &amp; Reactive Energy</b>	1% of reading IEC1036

### INSULATION

<b>Test Voltage</b>	4 kV RMS 50 Hz for 1 min
	Inputs/Case/Auxiliary/Output
	3kV RS485 / Outputs
	1.5kV Relay
	1kV between Outputs.
<b>Impulse Test</b>	EMC 5kV transient complying with IEC 801 / EN 55020 HF
<b>Surge withstand</b>	IEC 801 / EN55020 ANSI C37.90A
<b>Interference</b>	EHF 2.5 kV 1Mhz complying with IEC 255-4
<b>Protection Class II</b>	complying with IEC348

### APPLIED STANDARDS

<b>General</b>	IEC 688 BSEN60688, BS4889, IEC 359
<b>EMC</b>	Emissions BSEN50081/1 Immunity BSEN50082/2
<b>Safety</b>	IEC 1010, BSEN601010

### AUXILIARY

<b>AC voltage</b>	115 or 230 or 277 volts (±15%)
<b>DC voltage</b>	12 / 24 / 48 / 110 / 125 volts (±15%)

### ENVIRONMENTAL

<b>Working Temperature</b>	0 to +60 deg C
<b>Storage Temperature</b>	-30 to +65 deg C
<b>Temperature Coefficient</b>	0.01% per deg C


## ANALOG OUTPUTS

<b>3 outputs</b>	Programmable to any 3 parameters (Apart from energy measurements)
<b>Rated value</b>	Specified @ 20mA
	0-1mA into <10 kOhm load
	0-5mA into <2 kOhm load
	0-10mA into <1 kOhm load
	0-20mA into <0.5 kOhm load
	4-20mA into <0.5 kOhm load
	0-10 volts > 1kOhm load
<b>Load influence</b>	<0.1%
<b>Ripple</b>	<0.5% peak-peak at full load
<b>Response time</b>	<400 msec for 0-99% at full load
<b>Overload</b>	<2 x rated value at full load
<b>No load voltage</b>	< 18 volts

## APPROVALS

UL, C-UL, CSA

## CASE DIMENSIONS

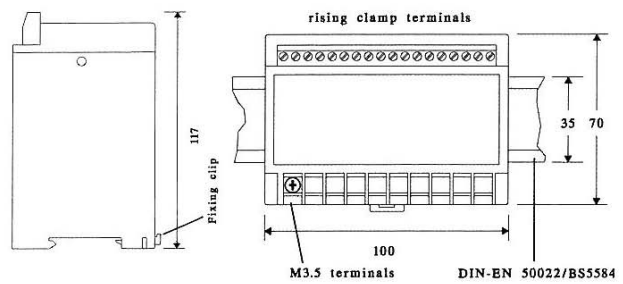

## CONNECTION DIAGRAMS

