

Digital Refrigerator / Freezer Thermometer

2560

The 2560 is a low temperature digital thermometer designed to hang, stand or be mounted with cable-ties inside cold storage cabinets. This is one of the most accurate refrigerator / freezer instruments with a specification of $\pm 1^{\circ}\text{F}$ ($\pm 0.5^{\circ}\text{C}$), and is guaranteed accurate for life. The 2560 is $^{\circ}\text{F} / ^{\circ}\text{C}$ selectable with a feature that records and displays the minimum and maximum temperatures reached during a particular period of time, independent of the current ambient temperature. The unique ABS plastic frame design is removable for easy cleaning. Both the thermometer and the frame are water resistant and incorporate an anti-microbial additive that prevents the growth of bacteria.



Specifications


- Temperature Range: -22° to 122°F (-30° to 50°C)
- Accuracy: $\pm 1^{\circ}\text{F}$ ($\pm 0.5^{\circ}\text{C}$) from -4° to 50°F (-20° to 10°C)
 $\pm 1.8^{\circ}\text{F}$ ($\pm 1^{\circ}\text{C}$) otherwise
- Resolution: 0.1°
- Response Time: 60 second updates
- Water resistant
- Min / Max feature
- FDA-approved ABS plastic housing with anti-microbial additive
- Display: $1.875'' \times .75''$ ($48 \text{ mm} \times 19 \text{ mm}$)
- Power: (1) 3V, CR2032 battery (included)
- Battery Life: 316 days with low battery indicator.
- Lifetime warranty (Accurate for Life)

LIFETIME WARRANTY INCLUDES CALIBRATION
ACCURACY: Any AFL designated instrument which proves to measure temperatures out of the specified accuracy range, or be defective in material or workmanship, will be replaced without charge upon receipt of the unit prepaid.



Packaging

- Individual Package Weight: 3 oz (85 g)
- Package Dimensions (L x W x H): $5'' \times 1.75'' \times 7.25''$
($127 \text{ mm} \times 45 \text{ mm} \times 184 \text{ mm}$)
- Package Cube: 0.4

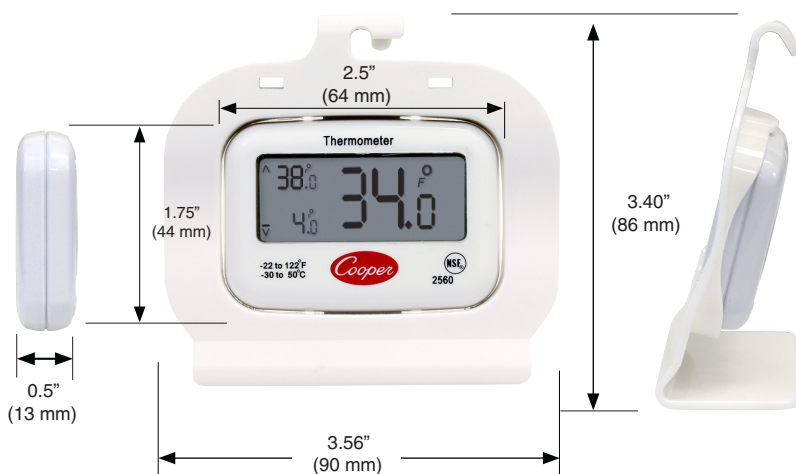

Still straining to read those
Bi-metal dial thermometers?
Try Our Easy-To-Read
DIGITAL 2560!



techniCAL
expanding possibilities
866-327-8731
www.techniCAL-sys.com



67-1391
V0813