

**Luxmeter  
LX 200**



**• Instantaneous illuminance**

Displaying of instantaneous / maximum / minimum values.

**• Relative illuminance**

Allows a relative measurement to a reference point to quantify a light input or an illuminance decrease.

**• Evolution of illuminance according to weather conditions**

Storage of temporal evolution of illuminance for the follow up of environment conditions.

**• Cartography of illuminance – Spatial representation**

Coloured representation according levels obtained for printing of report (on a computer such as PC).

**• Uniformity**

Calculation of the min / ave ratio for determination of illuminance uniformity at workstation according to standards\*.

**• As per following standards :**

NF EN 12464-1 – Lighting of workplaces (inside)

NF EN 12464-2 – Lighting of workplaces (outside)

NF EN 12193 – Lighting of sports facilities

**• Supplied with LLX200 software**


Operating software for data processing and printing of reports.




**LX200** hand-held luxmeter, self-contained and automatic is specially designed to illuminance measurement. It allows storage of datasets for processing on a computer via the **LLX200** software.




Determination of the illuminance uniformity of a local with graphic representation of workstations and luminaries

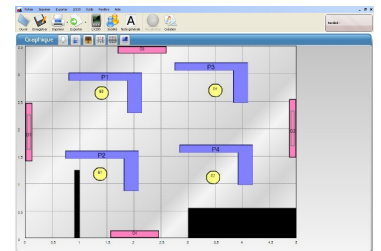

Following temporal evolution of illuminance of a workstation or a journey

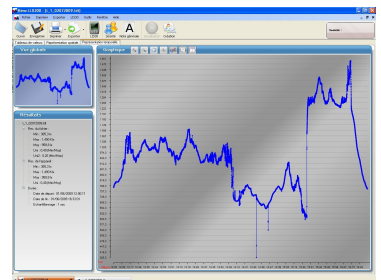

Illuminance cartography with coloured nuance of a workstation (sports facilities)

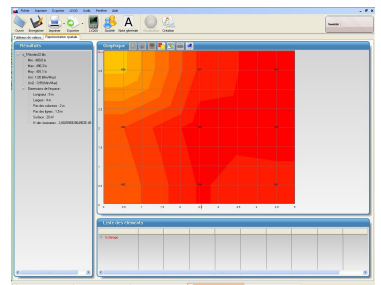

## ILLUMINANCE MEASURING RANGE

- ♦ from 0.0 to 200 000 Lux

| Display        | Unit | Resolution | Accuracy*                     |
|----------------|------|------------|-------------------------------|
| 0.0 to 10.0    | lx   | 0.1        | ± 2% of reading<br>or ± 2 lux |
| 10.0 to 99.9   | lx   | 0.1        |                               |
| 100.0 to 999.9 | lx   | 0.1        |                               |
| 1000 to 9999   | lx   | 1          |                               |
| 10.00 to 99.99 | klx  | 0.01       |                               |
| 100.0 to 200.0 | klx  | 0.1        |                               |

- ♦ from 0 to 18585 fc

| Display        | Unit | Resolution | Accuracy*                       |
|----------------|------|------------|---------------------------------|
| 0.00 to 1.00   | fc   | 0.01       | ± 2% of reading<br>or ± 0.19 fc |
| 1.00 to 99.99  | fc   | 0.01       |                                 |
| 100.0 to 999.9 | fc   | 0.1        |                                 |
| 1000 to 9999   | fc   | 1          |                                 |
| 10.00 to 18.58 | kfc  | 0.01       |                                 |

\* All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## SUPPLIED WITH

- **LX200** housing with silicon photodiode sensor and glass filter correction.
- Transport case
- 3 LR3-AAA batteries
- Calibration certificate
- User manual
- **LLX200** software

## OPTIONAL ACCESSORIES

- Extension for remote cell, 5 m length
- Battery module, 5 days autonomy
- AC adapter USB type

## METROLOGY


**LX200** instrument is calibrated on a specific optical bench. It comes with its calibration certificate. Our standard reference instruments are duly linked to COFRAC.

## TECHNICAL FEATURES

|   |  |
|---|--|
| <b>Measuring range</b>                          | From 0.0 to 200 000 Lux<br>From 0.00 to 18585 fc   |
| <b>Directional sensitivity (f2)<sup>1</sup></b> | < 6%   |
| <b>Linearity (f3)<sup>1</sup></b>               | < 2%   |
| <b>Measurement capability*</b>                  | From 04h30 to 99 days  |
| <b>Display</b>                                  | Backlit LCD graphic 128 x 64   |
| <b>Conditions of use (°C/ %RH/m)</b>            | From 0 °C to +50 °C. In non-condensation condition. From 0 to 2000 m.                    |
| <b>Storage temperature</b>                      | From 0 °C to +50 °C  |
| <b>Housing dimensions (without sensor)</b>      | 120 x 58 x 34 mm   |
| <b>Weight (housing + sensor + battery)</b>      | 185 g  |
| <b>Mini-USB plug</b>                            | For USB power supply adapter and data transfer   |
| <b>Power supply</b>                             | 3 batteries 1.5 V type LR3-AAA   |
| <b>Autonomy</b>                                 | 72 hours minimum, continuous operation   |
| <b>European directives</b>                      | 2004/108/EC EMC ;<br>2006/95/EC Low tension ;<br>2011/65/EU RoHS II ;<br>2012/19/EU WEEE |

\* According to the mode (uniformity, temporal or cartography)

<sup>1</sup> The f2 and f3 coefficient are defined according to the French NF C 42-710 standard.

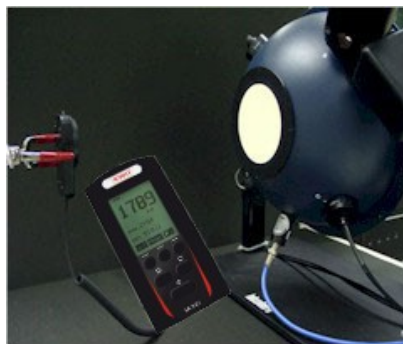

[www.kimo.fr](http://www.kimo.fr)



EXPORT DEPARTMENT  
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29  
e-mail : [export@kimo.fr](mailto:export@kimo.fr)

Distributed by :

**techniCAL**  
expanding possibilities  
866-327-8731  
[www.techniCAL-sys.com](http://www.techniCAL-sys.com)

