


## Optical tachometry probe / Tachometry contact probe

Part No.	Probe	Measuring units	Measuring range	Accuracy*	Resolution	Compatible devices
STA	Optical	tr/min, rpm	From 60 to 10 000 tr/min From 10 001 to 60 000 tr/min	$\pm 0.3\%$ of reading $\pm 1$ tr/min $\pm 30$ tr/min	1 tr/min	MP 210 VT 210 AMI 310
STA	Contact	tr/min, rpm	From 30 to 3000 tr/min	$\pm 1\%$ of reading $\pm 1$ tr/min	1 tr/min	MP 210 VT 210 AMI 310

Response time  $t_{95}$ : 2 s.

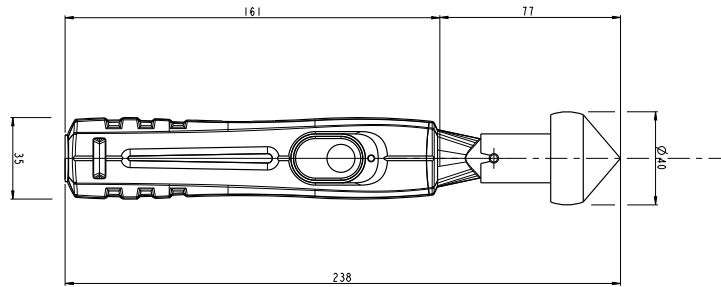

\*All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.