



## KISTOCK KT-20

### Temperature datalogger

Miniature datalogger for internal temperature, the KT-20 allows to record instantaneously the measured values. The KILOG 2015 software enables to configure and download the dataloggers.

- Fast data download (up to 1400 values/second)
- Up to 8192 measurement points
- 2 configurable setpoint alarms
- Small dimensions
- IP 56 housing



### TECHNICAL FEATURES

<b>Resolution</b>	0.5°C
<b>Storage capacity</b>	2048 or 8192 points
<b>Setpoint alarm</b>	2 setpoint alarms
<b>Frequency of measurement</b>	From 1 min to 255 min (KT-20-G) From 1 s to 273 h (KT-20-L and KT-20-T)
<b>Operating temperature</b>	From -40 to +85°C (KT-20-G and KT-20-L) From 0 to +125°C (KT-20-T)
<b>Storage temperature</b>	From -40 to +85°C
<b>Battery life</b>	5 years*

When used at a temperature higher than 50°C, the battery life of datalogger is reduced.  
 (\*) on the basis of 1 measurement each minute at 20°C (KT-20-G)  
 on the basis of 1 measurement each 10 minutes at 20°C (KT-20-L/T)

#### Temperature transmitter

<b>Measuring range</b>	-40 to +85°C (KT-20-G and KT-20-L) 0 to +125°C (KT-20-T)
<b>Accuracy</b>	KT-20-G : ±1°C (-30°C ≤ T ≤ +70°C) ±1,3°C (T < -30°C and T > +70°C) KT-20-L : ±0,5°C (+10°C ≤ T ≤ +65°C) ±1,3°C (T < +10°C and T > +65°C) KT-20-T : ±0,5°C (+20°C ≤ T ≤ +75°C) ±1,3°C (T < +20°C and T > +75°C)

All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

### FEATURES OF HOUSING

<b>Dimensions</b>	Ø 17.35 x 5.89 mm
<b>Weight</b>	3.3 g
<b>Material</b>	STAINLESS STEEL
<b>Protection</b>	IP 56
<b>PC communication</b>	Specific USB interface
<b>Environment</b>	Air and neutral gases

### REFERENCES

Part number	Storage capacity	Measuring range
KT-20-G	2048	From -40 to +85°C
KT-20-L	8192	From -40 to +85°C
KT-20-T	8192	From 0 to +125°C


### RECORDER FUNCTIONS

KT-20 can record measurements in real time. To do so, you just have to select the launch type:

- "immediate"
- "delayed" (with predefined date and time)
- "according alarm" : record is made when a measurement exceeds the setpoint alarm (function available on KT-20-L and KT-20-T models)

The dataset will stop once the storage capacity is full. You can also choose the non-stop record ("loop" recording option).

### DIMENSIONS

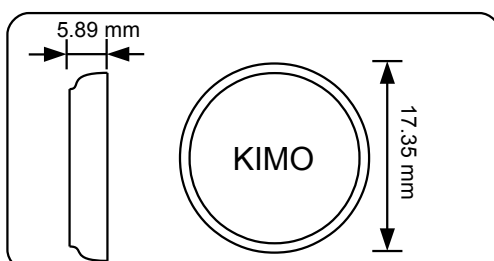

## KILOG SOFTWARES



- **Configuration and data processing software**

KILOG 2015 enables you to configure, save and process your data in a very simple way  
The USB interface and the driver software I-KIC1 are required to use with the KT-20.




- **KILOG CFR software**

KILOG 2015 CFR software is the key tool for users who require traceability, in accordance with 21 CFR-Part11 standards.  
Security and integrity of data are guaranteed: it is not possible to modify or tamper with the data.  
The USB interface and the driver software I-KIC1 are required to use with the KT-20.


<p><b>Software only</b> Configuration and data processing software KILOG 2015 type only. Compatible with all the Kistock devices The USB interface and the driver software I-KIC1 are required to use with the KT-20</p>	Ref. KILOG-3-N
<p><b>Interface only</b> USB interface, supplied with a driver software for class 20 Kistock</p>	Ref. I-KIC1
<p><b>Complete set: KILOG 2015 software + 2 USB interfaces</b> Configuration and data processing software KILOG 2015 type Supplied with the I-KIC1 interface (KT-20) and a USB cable CK-50 type for Kistock</p>	Ref. KIC13-N
<p><b>Complete set: KILOG 2015 CFR software + 2 USB interfaces</b> Configuration and data processing software KILOG 2015 CFR 21 type, in compliance with the CFR 21 part 11 standard Supplied with the I-KIC1 interface (KT-20) and a USB cable CK-50 type for Kistock</p>	Ref. KIC13-CFR-N

## CONNECTION

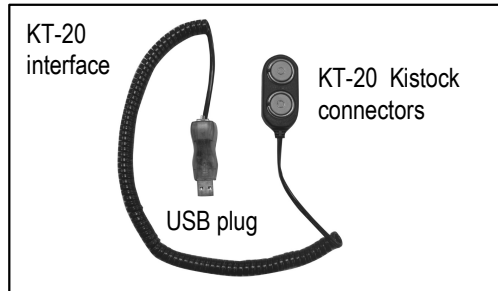

**WARNING:** Plug only one KT-20 at a time.

### Data download on the PC



Place the KT-20 as shown beside, and connect the USB to your PC.



Be careful to insert the KT-20 with the engraved side not visible.

## CALIBRATION

KISTOCK dataloggers can be supplied with calibration certificate as an option.

[www.kimo.fr](http://www.kimo.fr)



**EXPORT DEPARTMENT**  
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29  
e-mail : [export@kimo.fr](mailto:export@kimo.fr)

Distributed by :

**techniCAL**  
*expanding possibilities*  
866-327-8731  
[www.techniCAL-sys.com](http://www.techniCAL-sys.com)

